
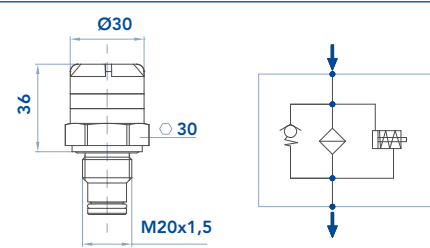
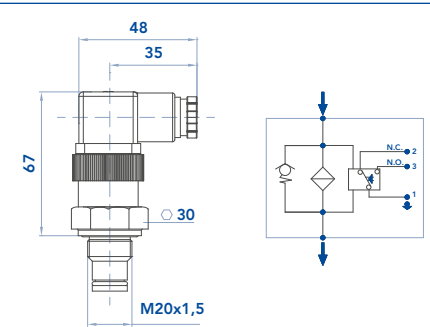


# OFF-LINE FILTERS

## CLOGGING INDICATORS

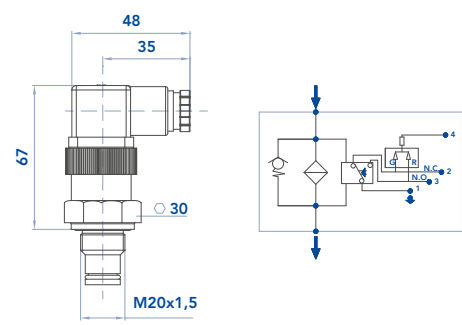

INDICATOR SERIE	DESCRIPTION	FOR OFF-LINE FILTERS SERIES
-----------------	-------------	-----------------------------

NBR	FKM	Differential VISUAL indicators	
5B	AB	Setting 1,3 bar (130 kPa)	FOF - UOW ROL - GTC 
NBR	FKM	Differential ELECTRICAL indicators	
6B	CB	Setting 1,3 bar (130 kPa)	FOF - UOW ROL - GTC 
		SPDT differential switch. C.C. 14 - 30 V: > max resistive or inductive load 4 - 3 A respectively C.A. 125-250 V: > max resistive or inductive load 1 A - Protection IP65 - Connector DIN 43650	
NBR	FKM	Differential ELECTRICAL indicators with LED (24 v) for visual indication	
7B	EB	Setting 1,3 bar (130 kPa)	FOF - UOW ROL - GTC 
		SPDT differential switch. C.C. 14 - 30 V: > max resistive or inductive load 4 - 3 A respectively C.A. 125-250 V: > max resistive or inductive load 1 A - Protection IP65 - Connector DIN 43650	

**INDICATOR SERIE DESCRIPTION FOR OFF-LINE FILTERS SERIES**

NBR	FKM	Differential ELECTRICAL indicators with THERMOSTAT 30° C	
T0	DB	Setting 1,3 bar (130 kPa)	FOF - UOW ROL - GTC
		SPDT differential switch. C.C. 14 - 30 V: > max resistive or inductive load 4 - 3 A respectively C.A. 125-250 V: > max resistive or inductive load 1 A - Protection IP65 - Connector DIN 43650	
NBR	FKM	Differential VISUAL ELECTRICAL indicators	
70	E0	Setting 1,3 bar (130 kPa)	FOF - UOW ROL - GTC
		SPDT differential switch. C.C. 14 - 30 V: > max resistive or inductive load 4 - 3 A respectively C.A. 125-250 V: > max resistive or inductive load 1 A - Protection IP65 - Connector DIN 43650	
NBR	FKM	Differential ELECTRICAL indicators ATEX	
008.0239.2	-	Setting 1,3 bar (130 kPa)	FOF - UOW ROL - GTC
		SPDT differential switch. C.C. 14 - 30 V: > max resistive or inductive load 4 - 3 A respectively C.A. 125-250 V: > max resistive or inductive load 1 A - Protection IP65 - Connector DIN 43650	

# OFF-LINE FILTERS

## CLOGGING INDICATORS



INDICATOR SERIE      DESCRIPTION      FOR OFF-LINE FILTERS SERIES

NBR	FKM	ELECTRONICAL Differential OFF-LINE CLOGGING INDICATOR	
008.0266.2	N/A	Setting 5 bar (100%) PNP-NO	<p>FOF</p>
		<p>PIN1:24V +/-10%. - PIN2: Analogue output 4-20mA - For input &lt; 25%FS analogue signal output is constant at 4mA - Accuracy at 25°C, for input &gt;25%FS = +/-5%FS max; - PIN3: Digital output 1 calibrated at 1,5bar – PNP – Max Load 0,2A – NO - PIN4: Digital output 2 calibrated at 2,0bar – PNP – Max Load 0,2A – NO - PIN5: 0V – GND Protection IP67 - Connector: M12x5PIN</p>	